




Pipe Guide Spacing Chart

The first guide must be located a maximum of 4 pipe diameters from the end of the bellows; the second guide a maximum of 14 pipe diameters. The chart below is for all bellows with inside diameter the same as piping.

Recommended Maximum Spacing of Intermediate Pipe Guides for Applications Involving Axial Movement

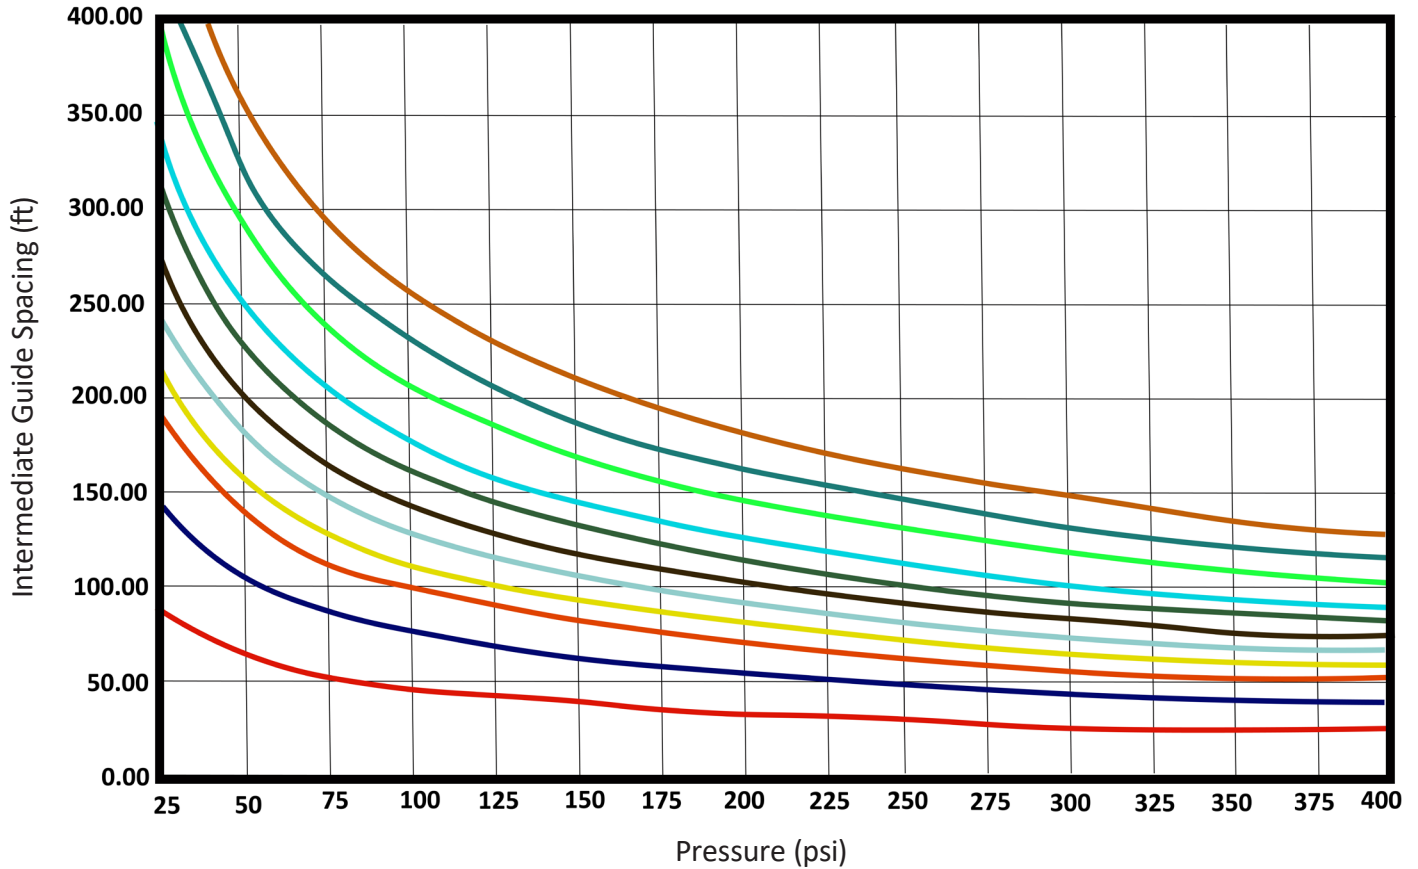

Legend			
4"	8"	12"	16"
20"	24"	30"	36"
48"	60"	72"	

This chart is for general reference only. Piping and ducting systems should be designed by qualified engineers and consider all system requirements.

